

Mecanconcept

One concept, multiple solutions


Three days after pouring concrete,
80% of the material is recovered

Clearing

The concept of Clearing (complete floor + propped floor) is related to the removing and reusing 80% of the equipment three days after pouring concrete. The 20% remaining must stay propped until the 21 or 28 days have passed.


1

Recovering the Support Girders.

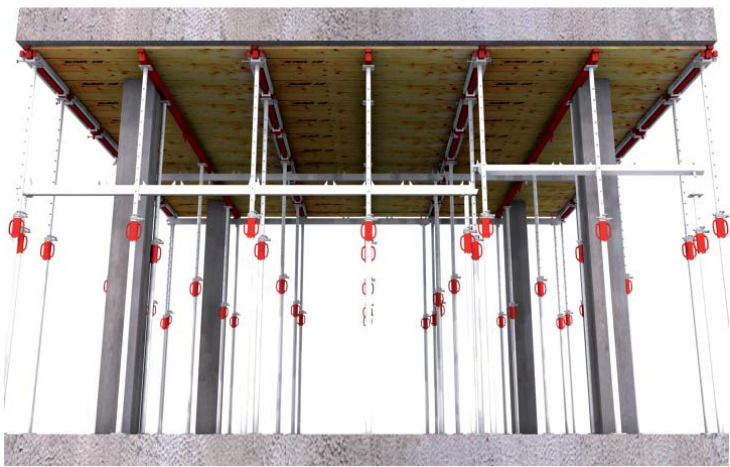

2

Recovering the intermediate Girders, post-shores and Drop Heads.

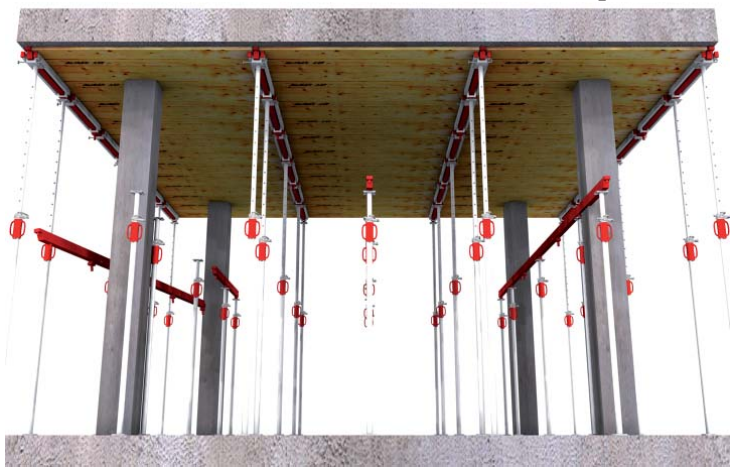


3

Recovering the Panels.



4

Only one Girder is left every two meters until the 21 or 28 days.

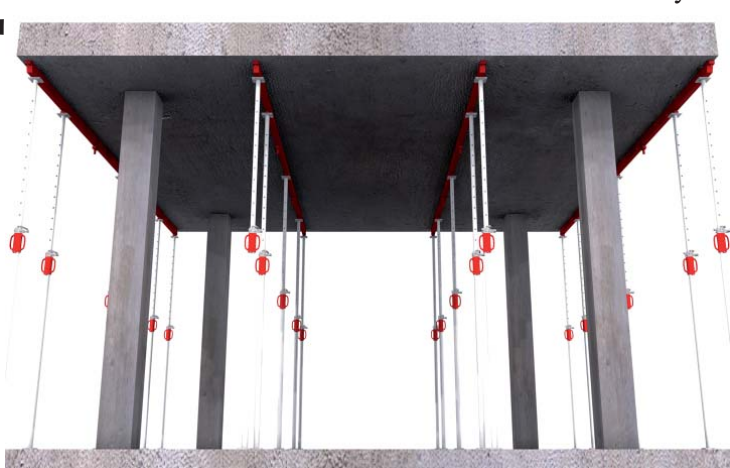

www.mecanconcept.com